

## **REMOTE STRIP - FLUORESCENT**

TWO LAMP T8 ELECTRONIC MEETS NYC REQUIREMENTS

**SERIES 213** 

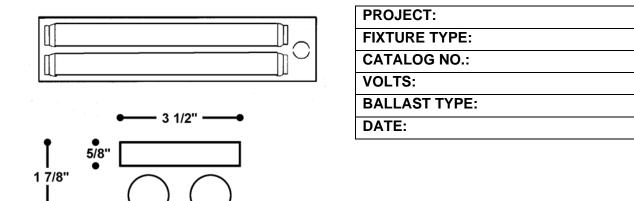

## REMOTE BALLAST BOX



**APPLICATIONS:** The T8 remote ballast strip with its unique shallow profile fits in where standard strips can not. Feature a remote ballast which can be located away from the illuminated area for ease of installation, maintenance, and quietness. Ideal for use in coves, valances, soffits, and wall slots. Welded construction and quality components assure long trouble free life.

## **SPECIFICATIONS**

**CONSTRUCTION:** The housing and ends are die formed of 20 GA cold rolled steel (CRS), rigidly fabricated and electrically welded to insure true and perfect alignment.

**BALLAST:** 17w, 25w, 32w, or 40 watt fully electronic T8, parallel instant start, high power factor, Class "A" sound rated, UL listed for 120 V 60 Hz operation are standard. Ballasts <10% THD along with other voltages and frequencies are also available. (CONSULT FACTORY).

**BALLAST BOX:** 15" ballast box is standard. BX connectors and Greenfield are by others. Knockouts are provided in ends of ballast box for entry and exit of wire leads (wire by others). Holes are provided on back for tie down to mounting surface.

**MOUNTING:** Installed singly or in continuous rows. For continuous mounting, knockouts provided on face can be used for thru feeding. Holes are provided on back for tie down to mounting surface.

FINISH: All steel components parts are corrosion protected and coated baked white synthetic polyester for maximum durability.

**CERTIFICATION:** U.L. listed and I.B.E.W.Union made.

## ORDERING INFORMATION

CATALOG #	LAMP	BALLAST	LENGTH (nominal)
213217T8	2-F17W-T8	ELECTRONIC	26 3/16"
213225T8	2-F25W-T8	ELECTRONIC	38 3/16"
213232T8	2-F32W-T8	ELECTRONIC	50 3/16"
213240T8	2-F40W-T8	ELECTRONIC	62 3/16"